

SCG DATA SHEET

TRUE FLAT



Description


True Flat is a slurry coated concrete roof tile with an interlocking flat profile for a refined contemporary appearance. Double Coating Technology improves long-term colour performance and protection.

Key Technology & Features

-  DOUBLE COATING TECHNOLOGY
-  STRONGER MOLECULAR BONDING
-  FLAT INTERLOCKING PROFILE

Technical Data

Thai Industrial Standard	TIS 535-2556
Tile coverage (+/- 2%)	Approx. 10.10 tiles/m ² at 33 cm batten spacing 10.75 tiles/m ² at 31 cm batten spacing
Dimensions (+/- 2%)	Length: 420 mm Width: 330 mm
Effective tile width after overlap	300 mm
Weight (+/- 2%)	Per tile: 5.2 kg Approx. 52.5 kg/m ² at 33 cm spacing, 55.9 kg/m ² at 31 cm spacing
Head lap adjustment (mm)	90-110
Design load of tiles per sq.m.	56 kg/m ²
Roof pitch	Minimum 25° Recommended 35-40° Maximum 40°

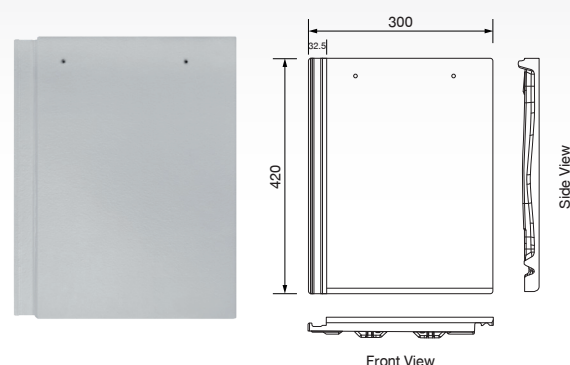

Color of Product

Available



Made-to-Order

